



# circular spacers “fast wheels”

**CONSTANT COVER**  
Even with rotation

**HUGE RANGE**  
To suit three bar sizes

**RUST FREE**  
Avoids rust migration

**STABLE**  
Sleeved clips prevents  
twisting & holds bar firmly

**EASY CLIP-ON**




## description

The extensive range of Modfix circular spacers are designed and manufactured from quality plastics, for strength and stability.

The unique design offers accurate cover for 360 degrees. It will not twist when in position due to the in-built sleeves which adjust to hold the bar firmly. As the size of the bar increases the cover remains the same.

The spacer concrete grey coloured, is designed to be connected to the fitment so that it is in a vertical position, enabling it to rotate when the formwork is assembled.

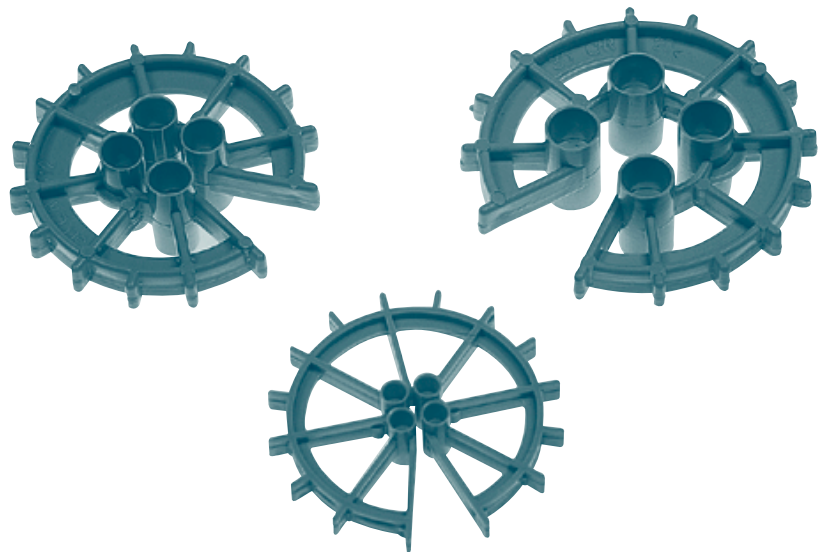

## ideal for

- Civil precast and commercial construction.
- Columns and piers.
- Bar spacers in conduit.

## size availability


Bar Size	Cover in mm						
3-6mm	12	15	20	25	30		
8-12mm		15	20	25	30	40	50
16-20mm			25	30	40	50	75





# circular spacers "fast wheels"


## DIMENSIONS

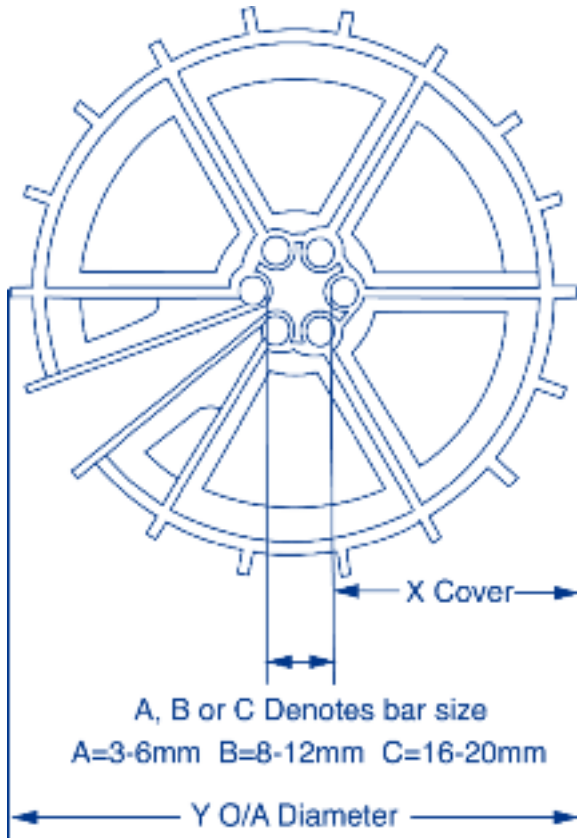

Order Code	Bar Size	X Cover	Y O/A Diameter
CA12CR6	3-6	12	30
CA15CR6	3-6	15	35
CA20CR6	3-6	20	45
CA25CR6	3-6	25	55
CA30CR6	3-6	30	65
CB15CR12	8-12	15	40
CB20CR12	8-12	20	50
CB25CR12	8-12	25	60
CB30CR12	8-12	30	70
CB40CR12	8-12	40	90
CB50CR12	8-12	50	110
CB65CR12	8-12	65	145
CB75CR12	8-12	75	160
CC25CR20	16-20	25	65
CC30CR20	16-20	30	75
CC40CR20	16-20	40	95
CC50CR20	16-20	50	115
CC75CR20	16-20	75	165

O/A Diameter can vary depending on size of bar.  
Packed in bags of 100, or available in bales.  
All dimensions are nominal and expressed in millimetres.

## TYPICAL APPLICATIONS

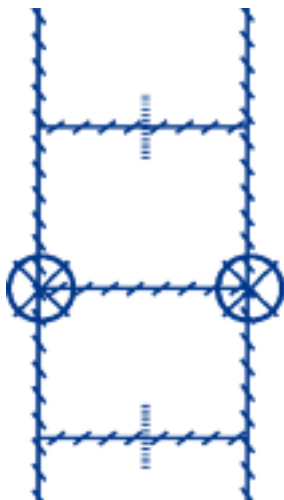

Columns and Piers



Bar Spacers inside conduit



**Modfix** a division of ITW Australia Pty Ltd  
45 Macbeth Street, Braeside, Victoria 3195  
Telephone: (61 3) 9586 7600  
Facsimile: (61 3) 9580 1766  
email: sales@modfix.com.au  
www.modfix.com.au

